



P: PANEL MOUNTED FANS



- *Sturdily constructed direct drive, horizontal discharge fan.
- *Durable powder coat finish.
- *Standard heavy duty OSHA motor mount/guard.
- *Motors are totally enclosed, air over with overload protection.

Model P: Panel Fans c/w OSHA Guard

Leader Fan Number	Blade Dia.	RPM	H.P	Volts	CFM @ Static Pressure				Weight Lbs.
					0"	0.1"	0.125"	.25"	
Single Speed/Variable Speed Fans									
P12-1V	12"	1700	1/4	115/230	1650	1560	1525	1400	23
P12-1VHE		1450	0.07	115	1350	1290	1275	1150	19
P14-1V	14"	1700	1/4	115/230	2170	2030	1950	1900	25
P14-1VHE		1450	0.07	115	1600	1525	1500	1300	21
P16-1V	16"	1700	1/4	115	2570	2470	2410	2260	26
P16-1VHE		1450	0.07	115	1850	1750	1700	1550	22
P18-1	18"	1700	1/4	115/230	3150	3000	2900	2575	31
P20-1	20"	1700	1/3	115/230	3620	3420	3340	3120	34
P24-1V	24"	1700	1/3	115/230	5500	5400	5310	5100	37
Single Speed Fan									
P12-2	12"	1100	1/3	115/230	1100	930	880	600	24
P14-2	14"	1100	1/3	115/230	1750	1550	1500	1100	26
P16-2	16"	1100	1/3	115/230	2150	2075	2000	1700	27
P18-2	18"	1100	1/3	115/230	3200	3000	2900	2750	32
P20-2	20"	1100	1/3	115/230	4400	4200	4100	3900	35
P24-2	24"	1100	1/3	115/230	5300	5050	4950	4700	39
P30-2	30"	1075	1/2	115/230	8000	7000	6000	5500	68
P36-7	36"	860	1/2	115/230	12000	11000	10500	9500	84
Two Speed Fans									
P08-3	8"	1660/1350	0.05	115	400/330	320/260	280/230	180/140	11
P10-3	10"	1660/1350	0.05	115	690/580	590/460	570/390	550/340	11
P12-3	12"	1725/1140	1/4	115	1670/1100	1600/950	1575/900	1450/625	24
P14-3	14"	1725/1140	1/4	115	2190/1440	2080/1325	2000/1300	1950/850	27
P16-3	16"	1725/1140	1/4	115	2580/1770	2480/1620	2430/1560	2270/1020	30
P18-3	18"	1725/1140	1/4	115	3200/2130	3050/2030	2950/1960	2625/1750	33
P20-3	20"	1725/1140	1/3	115	3640/2420	3440/2270	3360/2210	3140/1890	37
P24-3	24"	1075/860	1/3	115	5300/4240	5050/4040	4950/3960	4700/3760	41
Single Speed Explosion Proof Fans									
P12-4	12"	1725	1/3	115/230	1670	1600	1575	1450	43
P14-4	14"	1725	1/3	115/230	2190	2080	2000	1950	45
P16-4	16"	1725	1/3	115/230	2580	2480	2430	2270	47
P18-4	18"	1725	1/3	115/230	3200	3050	2950	2625	51
P20-4	20"	1725	1/3	115/230	3640	3440	3360	3140	52
P24-4	24"	1725	1/3	115/230	5520	5410	5330	5130	58

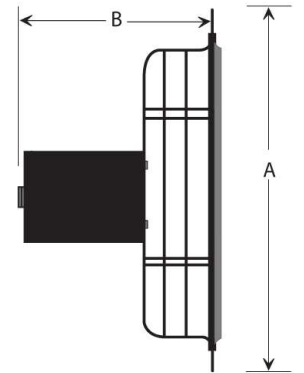

Model Number	A	B*	
		P	P-4
P08	14	6-1/2	-
P10			-
P12	17	11	13-3/4
P14	18-3/4		
P16	20-3/4		
P18	22-3/4	11-1/4	14
P20	24-3/4		
P24	28-3/4	11	13-3/4
P30	35-1/4	13-1/4	-
P36	41-1/4	13-1/2	-

*Sizes are approximates and may vary based on motor manufacturer.

*NEW - Explosion proof motors are Class 1 - Group C & D, and Class 2 - Group F & G.